

GUELL series

iN

UPDATE !
New models



PERFORMANCE
iN LIGHTING

GUELL series



GUELL MICRO KIT
p. 3

GUELL MICRO
p. 3

GUELL ZERO KIT
p. 4

GUELL ZERO
p. 4

GUELL 1
p. 6

GUELL 2
p. 8

Surge Protection Device (SPD)
up to 10 kV included



GUELL 2.5
p. 10



GUELL 3
p. 12




GUELL 4
p. 14

GUELL MICRO



3m
cable




IK06 1J xx3




● AN-96 / Anthracite gray / Textured

GUELL MICRO KIT S/EW

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	● 3101183	
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	● 3101182	




S/EW



IK06 1J xx3

GUELL MICRO S/EW

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	● 3101179	
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	● 3101178	



S/EW

ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL MICRO		
Connection Kit Y 3-way D.14-17mm IP68		310495
Connection Kit Y 3-way D.7-10.5mm IP68		310496
Connection Kit D.7-10.5mm IP68.		310513
Ground spike	●	700191



310495

310496

310513




● 700191

GUELL ZERO



IP 66



IK06 1.2J xx3

GUELL ZERO S/M

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	● 306514	
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	● 306512	
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	○ 306513	
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	● 06115394	
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	● 06149080	
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	○ 06148985	



IP 66


IK06 1.2J xx3

GUELL ZERO A/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
28 W	4000	A30/W	3382 lm	2575 lm	70	10	150000 h	● 306523	
28 W	4000	A30/W	3382 lm	2575 lm	70	10	150000 h	● 306521	
28 W	4000	A30/W	3382 lm	2575 lm	70	10	150000 h	○ 306522	
15 W	4000	A30/W	1888 lm	1472 lm	70	10	150000 h	● 06115794	
15 W	4000	A30/W	1888 lm	1472 lm	70	10	150000 h	● 06148680	
15 W	4000	A30/W	1888 lm	1472 lm	70	10	150000 h	○ 06148585	



IP 44



IK06 1.2J xx3

GUELL ZERO DETEK S/M


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	● 306530	
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	● 306529	
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	● 06120094	
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	● 06147480	



- GR-94 / Metallic grey / Textured
- BK-RAL9005 / Black RAL9005 / Glossy
- WH-RAL9010 / White RAL9010 / Glossy



S/M



A30/W



S/M




IP 44

GUELL ZERO DETEK A/W

IK06 1.2J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
28 W	4000	A30/W	3382 lm	2575 lm	70	10	150000 h	●	306536
28 W	4000	A30/W	3382 lm	2575 lm	70	10	150000 h	●	306535
15 W	4000	A30/W	1888 lm	1472 lm	70	10	150000 h	●	06120194
15 W	4000	A30/W	1888 lm	1472 lm	70	10	150000 h	●	06147380



A30/W



IP 66

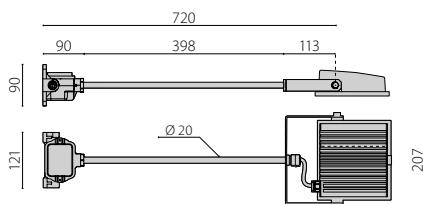


GUELL ZERO KIT S/M

IK06 1.2J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	●	306541
28 W	3000	S/M	3295 lm	2439 lm	70	10	150000 h	●	306539
28 W	4000	S/M	3382 lm	2572 lm	70	10	150000 h	○	306542
28 W	3000	S/M	3295 lm	2439 lm	70	10	150000 h	○	306540
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	●	06124980
15 W	4000	S/M	1888 lm	1484 lm	70	10	150000 h	○	06147585

ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL ZERO		
500 mm arm completes with connection base GUELL ZERO	●	14453380
500 mm arm completes with connection base GUELL ZERO	○	14463585
1000 mm arm completes with connection base GUELL ZERO	●	14453480
1000 mm arm completes with connection base GUELL ZERO	○	14463485




- 14453380 ● 14453480
- 14463585 ○ 14463485



GUELL 1



IP 66



IK07 3J xx5

GUELL 1 S/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	S/W	7276 lm	6092 lm	70	10	150000 h	●	06105494
39 W	4000	S/W	5558 lm	4890 lm	70	10	150000 h	●	06105794



IP 66

IK07 3J xx5

GUELL 1 A/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	A40/W	7276 lm	5950 lm	70	10	150000 h	●	06106694
53 W	3000	A40/W	7059 lm	5773 lm	70	10	150000 h	●	06106794
39 W	4000	A40/W	5558 lm	4712 lm	70	10	150000 h	●	06106994
39 W	3000	A40/W	5392 lm	4588 lm	70	10	150000 h	●	06107094



IP 66

IK07 3J xx5

GUELL 1 C/I

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	C/I	7276 lm	5739 lm	70	10	150000 h	●	06289194
39 W	4000	C/I	5558 lm	4599 lm	70	10	150000 h	●	06288594




● GR-94 / Metallic grey / Textured


AC/DC Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (consult factory).



S/W



A40/W



20°



IP 66

GUELL 1 C/W

IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	C/W	8190 lm	5439 lm	70	10	150000 h	●	3101115
39 W	4000	C/W	5992 lm	4315 lm	70	10	150000 h	●	3101109



IP 44

GUELL 1 DETEK S/W

IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	S/W	7276 lm	6092 lm	70	10	150000 h	●	06119994




IP 44

GUELL 1 DETEK A/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
53 W	4000	A40/W	7276 lm	5950 lm	70	10	150000 h	●	06114894
53 W	3000	A40/W	7059 lm	5773 lm	70	10	150000 h	●	06149394



50°



S/W



A40/W

ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 1		
Protective grid GUELL 1		14172902
Connection box IP 66		14174220
Wall support 500 mm/19.69" GUELL 1/2	●	14173394
Wall support 1000 mm/39.37" GUELL 1/2	●	14173494
Single pole top support GUELL 1	●	14453194
Double pole top support GUELL 1	●	14453294
GUELL 1 A/W - GUELL 1 S/W		
Soft glass GUELL 1	●	14173294
GUELL 1 A/W		
Louvre GUELL 1 Asymmetrical		14173120
GUELL 1 S/W		
Louvre GUELL 1 Symmetrical		14173020
GUELL 1 C/I		
GUELL 1 C/I frosted glass.	●	14476594



14172902 14174220 ● 14173394 ● 14173494




● 14453194 ● 14453294 ● 14173294



14173120 14173020 ● 14476594

GUELL 2



IK07 3J xx5

GUELL 2 S/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
133 W	4000	S/W	20380 lm	13804 lm	70	10	125000 h	● 3100132	
105 W	4000	S/W	14552 lm	11863 lm	70	10	130000 h	● 06094094	
78 W	4000	S/W	11116 lm	9520 lm	70	10	150000 h	● 06094294	



IK07 3J xx5

GUELL 2 A/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
133 W	4000	A40/W	20380 lm	13446 lm	70	10	125000 h	● 3100129	
105 W	4000	A40/W	14552 lm	11551 lm	70	10	130000 h	● 06094494	
105 W	3000	A40/W	14118 lm	11208 lm	70	10	130000 h	● 06105094	
78 W	4000	A40/W	11116 lm	9289 lm	70	10	150000 h	● 06094694	
78 W	3000	A40/W	10784 lm	9012 lm	70	10	150000 h	● 06105194	



IK07 3J xx5

GUELL 2 A50/W

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
80 W	4000	A50/W	12085 lm	10032 lm	70	10	130000 h	● 3105508	
80 W	3000	A50/W	10182 lm	9396 lm	70	10	130000 h	● 3105510	




● GR-94 / Metallic grey / Textured


AC/DC Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (consult factory).



S/W



A40/W



A50/W



GUELL 2 C/I

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
105 W	4000	C/I	14552 lm	10990 lm	70	10	150000 h	●	06287394
78 W	4000	C/I	11116 lm	8854 lm	70	10	150000 h	●	06286794



GUELL 2 C/W

IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
105 W	4000	C/W	14614 lm	10517 lm	70	10	150000 h	●	3101127
78 W	4000	C/W	11625 lm	8210 lm	70	10	150000 h	●	3101121



ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 2		
Protective grid GUELL 2		14173502
Connection box IP 66		14174220
Wall support 500 mm/19.69" GUELL 1/2	●	14173394
Wall support 1000 mm/39.37" GUELL 1/2	●	14173494
Single pole top support GUELL 2	●	14174094
Double pole top support GUELL 2	●	14174194
Reinforcing bracket GUELL 2 in painted steel. Used to fasten the floodlight with a single screw in the centre of the bracket.	●	14460594
GUELL 2 A/W - GUELL 2 S/W		
Soft glass GUELL 2	●	14173994
GUELL 2 A/W		
Cover GUELL 2 Asymmetrical	●	14173694
Louvre GUELL 2 Asymmetrical		14173820
GUELL 2 S/W		
Louvre GUELL 2 Symmetrical		14173720
GUELL 2 C/I		
GUELL 2/C GR-94 frosted glass.	●	14476794



14173502 **14174220** ● **14173394**

● **14173494** ● **14174094** ● **14174194**


● **14460594** ● **14173994** ● **14173694**

14173820 **14173720** ● **14476794**

GUELL 2.5



GUELL 2.5 S/W



IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
158 W	4000	S/W	21619 lm	18062 lm	70	10	130000 h	● 306125	
158 W	3000	S/W	20806 lm	16764 lm	70	10	130000 h	● 3102746	
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
238 W	4000	S/W	33426 lm	29534 lm	70	10	130000 h	● 306201	
238 W	3000	S/W	33099 lm	25987 lm	70	10	130000 h	● 3102747	
166 W	4000	S/W	22284 lm	20195 lm	70	10	130000 h	● 306199	
166 W	3000	S/W	22067 lm	19547 lm	70	10	130000 h	● 3103860	



GUELL 2.5 A/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
158 W	4000	A40/W	21619 lm	17511 lm	70	10	130000 h	● 306126	
158 W	3000	A40/W	20806 lm	16069 lm	70	10	130000 h	● 3102743	
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
238 W	4000	A40/W	33426 lm	28464 lm	70	10	130000 h	● 306202	
238 W	3000	A40/W	33099 lm	25517 lm	70	10	130000 h	● 3102744	
166 W	4000	A40/W	22284 lm	19364 lm	70	10	130000 h	● 306200	
166 W	3000	A40/W	22067 lm	19096 lm	70	10	130000 h	● 3103861	



GUELL 2.5 A50/W


IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
156 W	4000	A50/W	24170 lm	18453 lm	70	10	130000 h	● 306204	
156 W	3000	A50/W	23040 lm	17696 lm	70	10	130000 h	● 3103862	
118 W	4000	A50/W	18127 lm	13862 lm	70	10	130000 h	● 306203	
118 W	3000	A50/W	17280 lm	13294 lm	70	10	130000 h	● 3103863	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
156 W	4000	A50/W	24170 lm	18453 lm	70	10	130000 h	● 306206	
156 W	3000	A50/W	23040 lm	17696 lm	70	10	130000 h	● 3103864	
118 W	4000	A50/W	18127 lm	13862 lm	70	10	130000 h	● 306205	
118 W	3000	A50/W	17280 lm	13294 lm	70	10	130000 h	● 3103865	




- GR-94 / Metallic grey / Textured


AC/DC Possibility of AC/DC versions in accordance with EN 5012 and VDE 0108 (consult factory).



S/W



A40/W



A50/W





GUELL 2.5 C/I

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
158 W	4000	C/I	21619 lm	17576 lm	70	10	130000 h	●	306207
158 W	3000	C/I	22060 lm	18166 lm	70	10	130000 h	●	3103866
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
238 W	4000	C/I	33426 lm	27961 lm	70	10	130000 h	●	306210
166 W	4000	C/I	22284 lm	18999 lm	70	10	130000 h	●	306209
166 W	3000	C/I	22067 lm	19181 lm	70	10	130000 h	●	3103867



GUELL 2.5 C/IW


IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
158 W	4000	C/IW	21921 lm	16149 lm	70	10	130000 h	●	3101130
158 W	3000	C/IW	22060 lm	16350 lm	70	10	130000 h	●	3103868
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
238 W	4000	C/IW	34876 lm	26106 lm	70	10	130000 h	●	3101136
238 W	3000	C/IW	33101 lm	26431 lm	70	10	130000 h	●	3103869
166 W	4000	C/IW	23250 lm	17471 lm	70	10	130000 h	●	3101134
166 W	3000	C/IW	22067 lm	17688 lm	70	10	130000 h	●	3103870





ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 2.5 S/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical		310961
GUELL 2.5 A/W (166 W - 238 W)		
Louvre GUELL 2.5 Symmetrical		310962
GUELL 2.5 A/W - S/W (166 W - 238 W)		
GUELL 2.5 frosted glass	●	310964
GUELL 2.5		
Cover GUELL 2.5 (A40/W)	●	310963
Protective grid GUELL 2.5		310965
Wall mount support 1000 mm/39,37"	●	310982
Double pole top support GUELL 2.5	●	310967
Single pole top support GUELL 2.5	●	310966

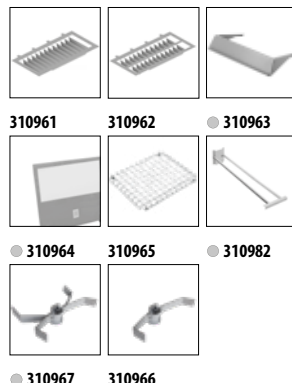

GUELL 3



● GR-94 / Metallic grey / Textured

GUELL 3 S/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
317 W	4000	S/W	44312 lm	36028 lm	70	10	130000 h	●	06171694
238 W	4000	S/W	33234 lm	26947 lm	70	10	130000 h	●	06172894



GUELL 3 A/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
317 W	4000	A40/W	44312 lm	33867 lm	70	10	130000 h	●	06171094
238 W	4000	A40/W	33234 lm	25329 lm	70	10	130000 h	●	06172294



GUELL 3 A50/W

IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
305 W	4000	A50/W	48341 lm	35814 lm	80	10	55000 h	●	306114
231 W	4000	A50/W	36256 lm	27496 lm	80	10	55000 h	●	306116





ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 3 A/W - S/W		
Frosted glass GUELL 3 (not suitable for 158 W).	●	14452994
GUELL 3 A/W		
Louvre GUELL 3 Asymmetrical (not suitable for 158 W).		14454520
Cover A40/W	●	14452894
GUELL 3 S/W		
Louvre GUELL 3 Symmetrical (not suitable for 158 W).		14454220
GUELL 3		
Protective grid		14452702
Wall mount support 1000 mm/39,37"	●	14453994
Single pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"	●	14453794
Double pole top support GUELL 3 for poles Ø 60-76 mm/Ø 2.36"-2.99"	●	14453894
GUELL 3 strengthening bracket. Suitable for one floodlight single point fixing M10 screw in centre of the bracket.	●	14461104



GUELL 4

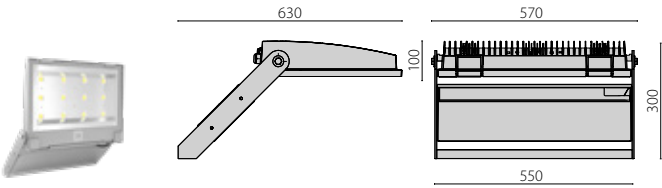

● GR-94 / Metallic grey / Textured

GUELL 4 S/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
430 W	4000	S/W	58452 lm	50573 lm	70	10	130000 h	●	06210094



GUELL 4 A/W

IK07 3J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - dimmable 1-10 V 220-240 V 50/60 Hz									
430 W	4000	A40/W	58452 lm	46372 lm	70	10	130000 h	●	06210394



GUELL 4 A50/W

IK07 3J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - dimmable DALI 220-240 V 50/60 Hz									
448 W	4000	A50/W	72511 lm	52346 lm	80	10	55000 h	●	306128



ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
GUELL 4 A/W - S/W		
Vetro soft GUELL 4	●	14465794
GUELL 4 A/W		
Cover A40/W	●	14452894
GUELL 4		
Protective grid		14452702



● **14465794**

14452702

● **14452894**



PERFORMANCE **iN** LIGHTING

The data contained in this brochure is for reference purposes only and does not involve any commitment by Performance iN Lighting S.p.A., which reserves the right to make all necessary changes without prior notice. Partial or complete reproduction of this brochure is forbidden.



PERFORMANCE iN LIGHTING S.p.A.

Viale del Lavoro 9/11

37030 Colognola ai Colli (VR) - Italia

Ph +39 045 61 59 211

Fax +39 045 61 59 292

www.performanceinlighting.com

